



Residential turnouts at primary and secondary roads shall be a minimum of 9' and a maximum of 20', with a 3' flair on each side. Town of Jupiter Ord. 32-91 requires that Turnouts be located a minimum of 30' setback from intersection roads or street right of way.

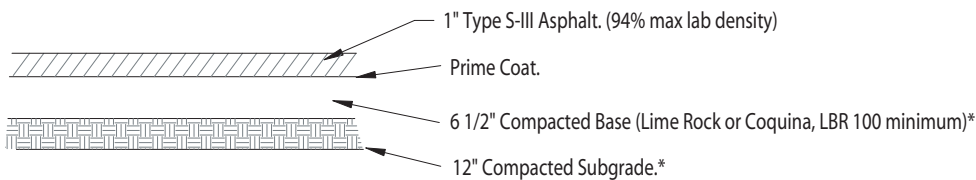


ASPHALT DRIVEWAY TYPICAL DETAIL

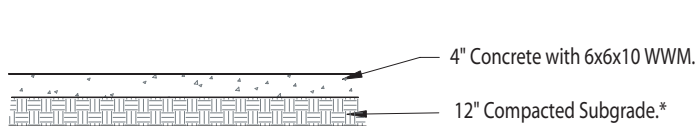

ALTERNATE:
6" Concrete & 12" compacted subgrade.
Subgrade density testing by geotechnical company is mandatory.

CONCRETE DRIVEWAY TYPICAL DETAIL

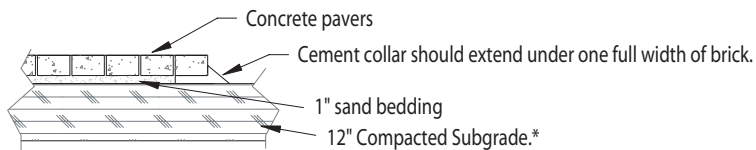

PAVER DRIVEWAY TYPICAL DETAIL

* NOTE: DENSITY SHALL BE 98% OF MAXIMUM DENSITY - AASHTO T-180



TOWN OF JUPITER
ENGINEERING DIVISION

210 MILITARY TRAIL
JUPITER, FLORIDA 33458
(561) 746-5134

RESIDENTIAL DRIVEWAYS

DETAIL AND REQUIREMENTS

K:\Drawings\details\2003\108-driveways.dwg

DETAIL NUMBER

108

Revised 20030328